


Premium Area Light

QuadroMAX Plus is a modular area lighting system with independent LED modules that interlock to create configurations from 50W to 300W, reaching 36,000+ lumens. Offering unprecedented functionality in the field, the head module disconnects from the fixture for quick and easy driver replacement in just minutes!

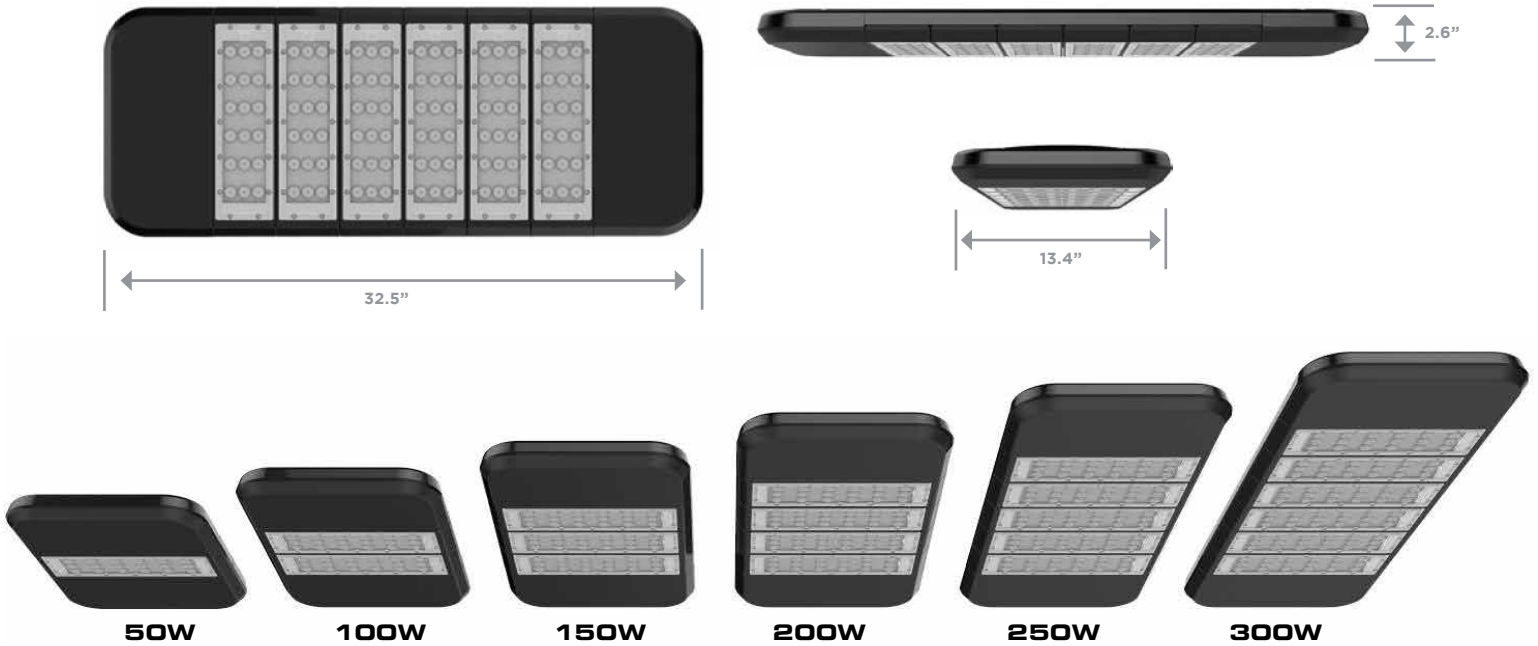

CONSTRUCTION:

- Die Cast Aluminum housing.
- Polycarbonate lens material.

DESIGN:

- Five different mounting options to address three key areas of lighting.
- Independent modules interlock via quick-connect cables to allow for modular design ranging from 50W to 300W.
- Field-replaceable driver functionality – head module containing driver can be easily disconnected from fixture and replaced by a new one.

OPTICS:

- Available in Type II, Type III, Type IV, and Type V optics to allow for a range of asymmetric to symmetric distributions.

PROTECTION:

- 10kV Surge Suppression Standard.
- Listed for use in wet locations to UL standards and meet IP66 rating.
- LEDs are rated for greater than 100,000 hour life with lumen maintenance > 70% (L70) at 25°C.
- Wide operating range up to 60°C.

LUMEN	COLOR TEMPERATURE	VOLTAGE	FINISH	OPTIONS
6,000	3000K	120-277V	Bronze	Daylight/Motion Sensor
12,000	4000K	347-480V	Black	Photocontrol Receptacle (3-pin, 5-pin, 7-pin)
18,000	5000K		White	
24,000			RAL = custom	
30,000				
36,000				